




(SCW 14) Vers. "B"



Stainless Steel
Back Panel
(standard)












Features

- Refrigerated drinking water fountain, USPH-S Regulations Compliant.
- Includes foot pedal activated water glass-filler and push button activated projector.
- Water thermostat positioned in the front of the unit for ease of reach.
- Delivers 50 liters per hour (13.2 gph) of 8°-12°C (46°-53°F) water (at 32°C-90°F ambient and 21°C-70°F inlet water temperatures).
- Cabinet and base finish, as well as all interior metal parts, in Stainless Steel.
- Easily removable front panel for routine maintenance & technical service access purposes.
- "Pierce Yourself" style incoming/outgoing utilities passages and internal connection turrets allow for maximum installation flexibility.
- High-efficiency water cooling tank and coil.
- Stainless Steel basin is designed to eliminate splashing and stagnant water.
- Waterways are lead-free.
- Operable on 220-240 volts, 50/60 Hz.
- Special 115/60/1 model available upon request.
- Cooling system uses R-134a refrigerant.
- Complies with ADA requirements when properly installed.
- Limited 2 years Warranty against manufacturing defects.

Technologies



	 <div>+C° -C°</div>	  <div>32°C 90°F</div>   <div>21°C 70°F</div>		 <div>H D W</div>	
SCW 14 B		[°C]	[°F]	[l/h]	[gal/h]
		8 ÷ 12	46 ÷ 53	50	13.2
		 <div>[v/Hz/ph] 230/50-60/1</div>		 <div>R 134 a</div>	

This product qualifies for the following listings:



Note:

Complete with foot pedal activated glass filler and push button activated projector.
AISI 304 stainless steel.

2 Years Warranty

Subject to certain limitations and exclusions

Certified ISO 9001:2008

www.scotsman-ice.it
www.scotsman-ice.com


Models and specifications are subject to change without notice.

Scotsman®

Ice Systems

Pressure Water Cooler

SCW14 B-EVO

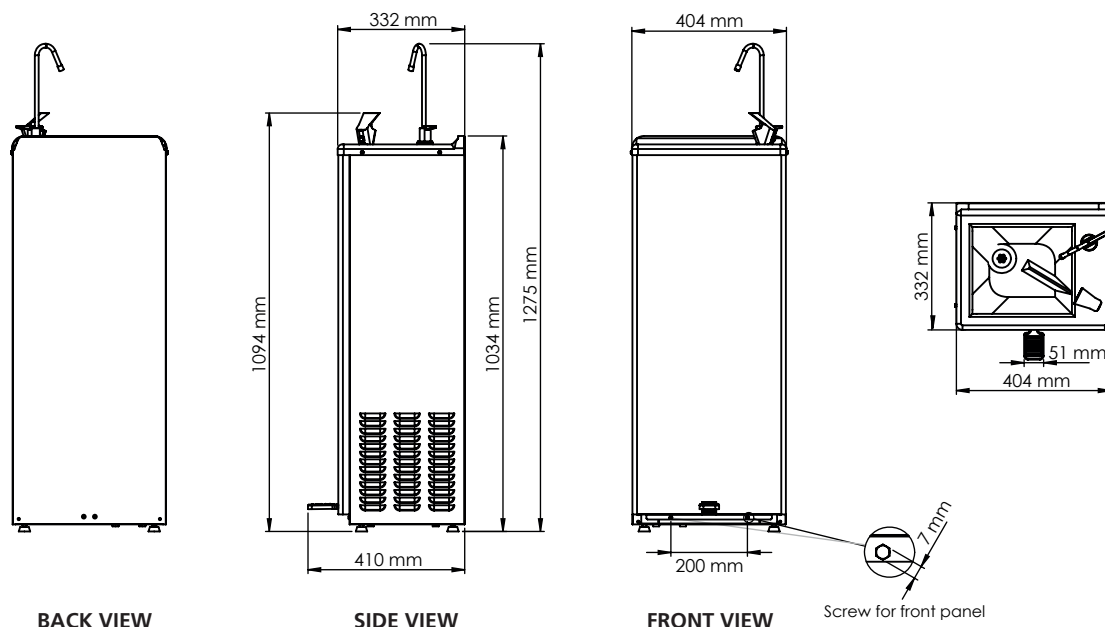

Can be used free standing or wall tight to avoid unsightly connections.
Exclusive Projector Design: 2-stream mound-building projector and automatic stream regulator.
Plumbing Connections: "Pierce yourself"
Water supply 8 mm (3/7") IPS.
Finish: stainless steel.

Minimum		Maximum
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
-10%		+10%
1 BAR 14 psi		5 BAR 70 psi

	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh]	[kg] [lbs]	[kg] [lbs]
SCW14 B		1208 353	3 x 1	250	10	0,25	33 73	36 79

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg

2/2015